NETWORK

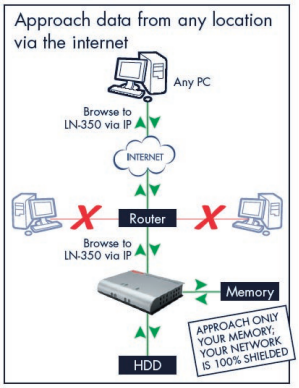

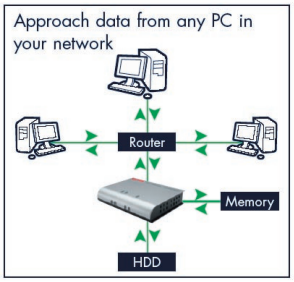

Data sheet: LN-350

Product code	:	LN-350
Product name	:	Network Storage Adapter
EAN code	:	8716502005963
Qty. masterpack / carton	:	5/20
Product weight	:	202 gr.
Product dimensions	:	147(W) x 110 (D) x 30mm (H)
Gift box weight	:	To be dated.
Gift box dimensions	:	209(W) x 165,5 (D) x 66 mm (H)

Using this Network Storage Adapter, it is extremely simple to share two external USB hard disks and/or flash disks with all the other PC's in your network. You can connect the external storage equipment via a network cable to the network switch. Thanks to the Network Storage Adaptor's USB 2.0 connection, fast data transfer to and from the connected media is guaranteed. The integrated ftp server also makes it possible to manage and edit data on the storage media connected via an Internet connection.
Sharing an external hard disk and/or flash disk has never been so simple!

Box content:

- Network Storage Adapter
- CD Rom
- Quick Installation Guide
- Power Adapter

System requirements:

- Windows 98SE/2000/ME/XP
- CD Rom drive

Key features:

- Share external USB Storage Devices in your network or approach them via the internet
- Share files and add storage in your network
- Direct accessible via Internet without entry to your local network
- 2 USB 2.0 ports to connect 2 USB storage devices

NETWORK

Data sheet: LN-350

Technical specifications:

- Compliant with USB1.1 / USB2.0
- Equipped with one 10/100Mbps auto-MDIX fast Ethernet LAN port
- Supports Hot-plug.
- 2 modes supported: Open mode and Account mode
- IP assignment support for DHCP and static IP
- IP address filtering for Ethernet access with either DENY or ALLOW setting.
- Supports USB storage (Hard-disk, flash disk, CDROM)
- Download assistance, make users download files without PC and schedule-able. (support ftp, http)
- Support NTP (network time protocol)
- Web-based administrative program is stored in flash ROM of the server.
- Firmware upgrade-able by Windows-based utility
- Support Windows 98/ME/NT/2K/XP and Linux SMB.
- Provides FTP Server service
- Provides an easy-search program for different IP domain setting.
- Interface standards : IEEE 802.3, IEEE 802.3u, USB 2.0, USB 1.1
- Power Requirement: 5V DC , 2.4 Amp.

Ports

- One 10/100 RJ 45 phone Jack with Auto MDI-X
- Two USB 2.0 porst
- One Power port

Environment:

- Operating Temp: 5 to 50 degree C
- Storage Temperature: -20 to 50 degree C
- Operating Humidity: 10 to 90%, Non-condensing
- Storage Humidity: 5 to 95% , Non-condensing